





EI CORES

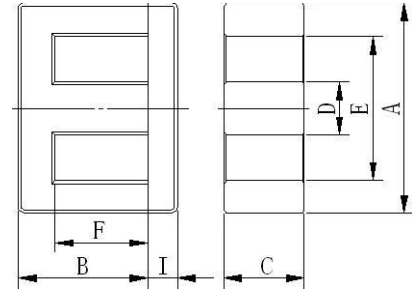


Part #	EI16	EI19	EI22A	EI22B	EI25A	EI25B
	EI	EI	EI	EI	EI	EI
(mm)	A	16.10±0.30	19.20±0.40	22.00±0.60	25.40±0.60	25.40±0.60
	B	12.30±0.20	13.60±0.30	14.50±0.30	15.80±0.30	16.50±0.30
	C	4.80±0.20	4.80±0.20	5.70±0.30	6.30±0.30	6.60±0.30
	D	3.90±0.20	4.50±0.20	5.70±0.30	6.30±0.30	6.60±0.30
	E	11.50min	14.00min	15.60min	18.60min	18.60min
	F	10.30±0.20	11.30±0.30	10.50±0.30	12.80±0.30	13.20±0.30
	I	2.00±0.20	2.40±0.30	4.00±0.30	3.00±0.30	3.50±0.30
C1(mm ⁻¹)	1.72	1.50	1.08	1.12	1.30	1.10
Le(mm)	34.5	39.1	41.6	42.3	50.1	48.5
Ae(mm ²)	19.9	24.1	38.4	37.8	39.8	44.3
Ve(mm ³)	683	936.2	1600	1600	1994	2145
G(g)	3.4	4.6	8.4	9.0	10	12.3
AL	PC40	0.41	0.56	0.96	0.96	1.29
	PC44	0.38	0.51	0.88	0.88	1.18
	PC95	0.38	0.51	0.88	0.88	1.18
	PC40	1220	1400	2030	1960	2000
	PC44	1330	1460	2130	2050	2090
	PC95	1620	1860	2590	2500	2540

PC40、PC44:100KHz, 200mT, 100℃
 PC95 :100KHz, 200mT, 80℃
 1) :100KHz, 100mT, 100℃
 2) :25KHz, 200mT, 100℃

1KH, 0.25V, 25℃
 ±25%



EI CORES

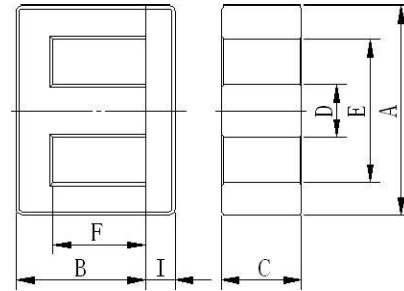

Part #		EI28A	EI28B	EI30	EI33	EI35	EI40A
		EI	EI	EI	EI	EI	EI
(mm)	A	28.00±0.60	28.00±0.60	30.00±0.60	33.00±0.60	35.00±0.60	40.00±0.70
	B	17.50±0.30	16.60±0.30	21.50±0.30	23.80±0.30	24.40±0.30	27.80±0.30
	C	10.70±0.30	10.70±0.30	10.70±0.30	12.70±0.30	10.00±0.30	11.80±0.30
	D	7.20±0.30	7.20±0.30	10.70±0.30	9.70±0.30	10.00±0.30	11.80±0.30
	E	18.60min	18.60min	19.60min	23.50min	24.50min	26.80min
	F	12.80±0.30	12.80±0.30	16.50±0.30	19.30±0.30	18.40±0.30	20.90±0.30
	I	3.50±0.30	4.00±0.30	5.50±0.30	5.00±0.30	4.60±0.30	7.00±0.30
	C1(mm ⁻¹)	0.55	0.57	0.52	0.57	0.61	0.50
	Le (mm)	49.3	48.2	58.4	67.8	65.6	75.9
	Ae (mm ²)	89.5	86.0	110.2	122.0	108.0	151.2
	Ve (n m ³)	4399	4145	6436	8274.2	7105	11481.9
	G(g)	21	20	36	40	40	55
AL	PC40	2.64	2.49	3.86	4.96	4.26	6.89
	PC44	2.42	2.28	3.54	4.55	3.91	6.32
	PC95	2.42	2.28	3.54	4.55	3.91	6.32
	PC40	3800	3680	4230	3860	3600	4400
	PC44	4100	3860	4420	4000	3770	4600
	PC95	5090	4900	5380	4900	4590	5600

PC40、PC44:100KHz, 200mT, 100℃
 PC95 :100KHz, 200mT, 80℃
 1) :100KHz, 100mT, 100℃
 2) :25KHz, 200mT, 100℃

1KH, 0.25V, 25℃
 ±25%



PC40、PC44: 100KHz, 200mT, 100℃	1KH, 0. 25V, 25℃
PC95 : 100KHz, 200mT, 80℃	±25%
1) : 100KHz, 100mT, 100℃	
2) : 25KHz, 200mT, 100℃	