
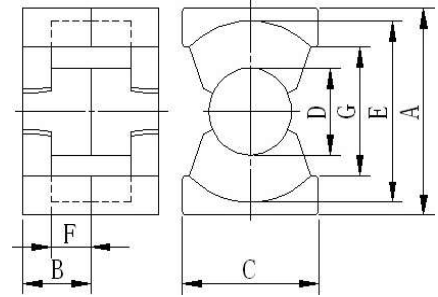


PQ CORES





PQ-a

Part#		PQ20/16	PQ20/20	PQ21/16	PQ21/20	PQ26/20	PQ26/25	PQ2720
		PQ-a	PQ-a	PQ-a	PQ-a	PQ-a	PQ-a	PQ-a
(mm)	A	20.50±0.40	20.40±0.40	21.40±0.40	21.40±0.40	26.50±0.50	26.50±0.45	27.40±0.50
	B	8.10±0.10	10.10±0.10	8.10±0.10	10.10±0.10	10.10±0.10	12.40±0.10	10.10±0.10
	C	14.00±0.40	14.00±0.40	14.00±0.40	14.00±0.40	1900±0.45	19.00±0.45	19.00±0.45
	D	8.80±0.20	8.80±0.20	8.80±0.20	8.80±0.20	12.00±0.20	12.00±0.20	12.00±0.20
	E	18.00±0.40	18.00±0.40	18.75±0.40	18.75±0.40	22.500±0.45	22.50±0.45	23.40±0.45
	F	5.20±0.20	7.15±0.15	5.20±0.15	7.15±0.15	5.70±0.15	8.00±0.15	5.70±0.15
	G	12.00min0	12.00min	14.00±0.40	14.00±0.40	15.50min5	17.90±0.45	17.90±0.45
	C1(mm ⁻¹)	0.61	0.74	0.605	0.738	0.39	0.47	0.391
	Le (mm)	37.4	45.4	37.4	45.4	46.3	55.5	46.3
	Ae (mm ²)	62	62	62.0	62.0	119	118	119.0
	Ve (mm ³)	2310	2790	2310	2810	5490	6530	5490
	G(g)	13	15	13.5	15	31	36	33
AL	PC40	1.39	1.67	1.39	1.69	3.29	3.92	3.29
	PC44	1.27	1.53	1.27	1.55	3.02	3.59	3.02
	PC95	1.27	1.53	1.27	1.55	3.02	3.59	3.02
	PC40	3600	2900	3700	3000	5600	4700	5700
	PC44	3700	3000	3800	3100	5800	4800	5900
	PC95	4590	3800	4600	3800	7200	5900	7200

PC40、PC44: 100KHz, 200mT, 100°C
 PC95 : 100KHz, 200mT, 80°C
 1) : 100KHz, 100mT, 100°C
 2) : 25KHz, 200mT, 100°C

1KH, 0.25V, 25°C
 ±25%

PQ CORES

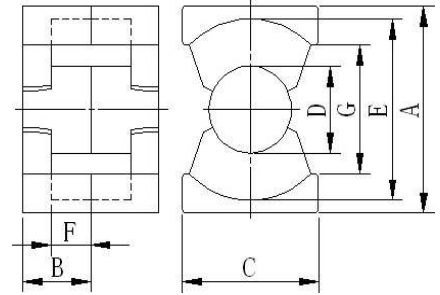


PQ-a

Part#		PQ2725	PQ3220	PQ3225	PQ3230	PQ3320	PQ3325	PQ3330
		PQ-a	PQ-a	PQ-a	PQ-a	PQ-a	PQ-a	PQ-a
(mm)	A	27.40±0.50	32.00±0.60	32.00±0.60	32.00±0.60	33.05±0.50	33.05±0.50	33.05±0.50
	B	12.40±0.10	10.10±0.20	12.50±0.20	15.00±0.20	10.20±0.10	12.60±0.10	15.10±0.10
	C	19.00±0.45	22.00±0.50	22.00±0.50	22.00±0.50	22.00±0.50	22.00±0.50	22.00±0.50
	D	12.00±0.20	13.40±0.30	13.40±0.30	13.40±0.30	13.35±0.25	13.35±0.25	13.35±0.25
	E	23.40±0.45	27.80±0.50	27.80±0.50	27.80±0.50	28.90±0.50	28.90±0.50	28.90±0.50
	F	8.00±0.15	5.70±0.20	8.40±0.20	10.60±0.20	5.80±0.15	8.20±0.15	10.70±0.15
	G	17.90±0.45	20.60±0.50	20.60±0.50	20.60±0.50	21.60±0.50	21.60±0.50	21.60±0.50
Cl(mm ⁻¹)		0.472	0.324	0.389	0.456	0.333	0.398	0.466
Le(mm)		55.5	49.7	59.24	69.2	50.7	60.2	70.26
Ae(mm ²)		118.0	153.5	152.4	151.6	152.3	151.4	150.7
Ve(mm ³)		6530	7627	9030	10493	7716	9119	10582
G(g)		36	39	46	53	40	47	54
AL	PC40	3.90	5.60	6.20	7.10	5.60	6.20	7.10
	PC44	3.55	5.10	5.70	6.50	5.10	5.70	6.50
	PC95	3.55	5.10	5.70	6.50	5.10	5.70	6.50
	PC40	4800	6500	5300	4600	6500	5300	4600
	PC44	5000	6600	5400	4700	6600	5400	4700
	PC95	5800	8000	6600	5600	8000	6600	5600

PC40、PC44:100KHz, 200mT, 100°C
 PC95 :100KHz, 200mT, 80°C
 1) :100KHz, 100mT, 100°C
 2) :25KHz, 200mT, 100°C

1KH, 0.25V, 25°C
 ±25%

PQ CORES

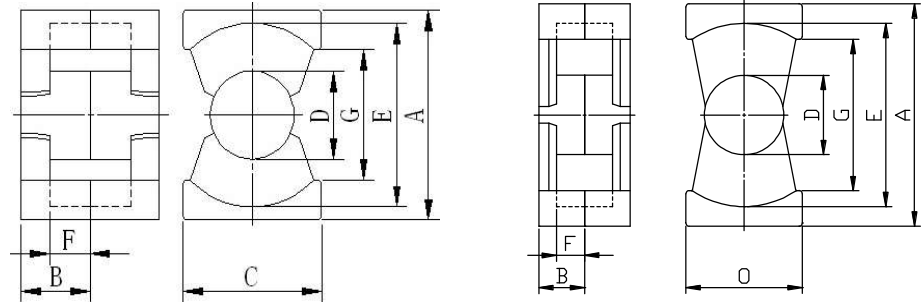

PQ-a

PQM

Part#		PQ3535	PQ4040	PQ5050	PQ6050	PQM40/21
		PQ-a	PQ-a	PQ-a	PQ-a	PQM
(mm)	A	35.30±0. 60	40. 80±0. 90	50. 10±0. 70	60.20±0. 80	40.80±0. 60
	B	17.40±0.15	19.90±0.15	25.00±0.15	25. 20±0. 20	7.00±0. 20
	C	26.00±0. 50	28.00±0. 60	32.00±0. 60	38.00±0. 60	21.00±0. 50
	D	14.35±0.25	14. 90±0. 30	20.00±0. 35	24.80±0. 35	14.10±0. 25
	E	32.10±0. 50	37.20±0. 60	44.00±0. 70	52.10min	33.10±0. 50
	F	12.50±0. 15	14.75±0. 15	18.05±0. 15	18.00±0. 20	4.05±0. 15
	G	24.50±0. 50	30.50±0. 60	34.30±0. 60	40.00min	27.20±0. 50
	C1(mm ⁻¹)	0.440	0. 475	0.346	0.264	0.337
	Le (mm)	79.30	93.07	113.0	120	44.7
	Ae (mm ²)	180.3	195.8	328.0	453.8	132.4
	Ve (n m ³)	14295	18226	37240	54466	5926
	G(g)	71	91	194		34
	PC40	8.86	11.30	3.70 ¹⁾	6.53 ¹⁾	3.56
	PC44	8.00	10.20	3.30 ¹⁾	5.44 ¹⁾	3. 0
	PC95	8.00	10.20	3.30 ¹⁾	5.44 ¹⁾	3. 0
AL	PC40	5000	4600	6400	8400	6300
	PC44	5100	4700	6500	8700	6400
	PC95	6200	5700	7800	10600	8300

PC40、PC44:100KHz, 200mT, 100°C

PC95 :100KHz, 200mT, 80°C

1) :100KHz, 100mT, 100°C

2) :25KHz, 200mT, 100°C

1KH, 0.25V, 25°C

±25%