


RM CORES

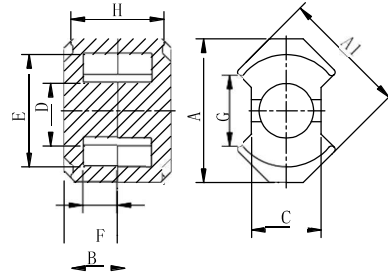

Part No	RM4	RM5	RM6	RM8	RM10	RM12	RM14
Type							
A1	9.60±0.20	12.00±0.30	14.40±0.30	19.30±0.40	24.10±0.60	29.20±0.60	34.10±0.60
A	10.75±0.25	14.65±0.30	17.55±0.35	22.70±0.50	27.80±0.70	36.70±0.70	41.50±0.70
B	5.20±0.10	5.20±0.10	8.80±0.10	11.40±0.10	9.30±0.10	12.20±0.10	15.50±0.10
C	4.50±0.10	6.60±0.20	8.00±0.20	10.70±0.30	13.20±0.30	15.80±0.30	18.70±0.30
D	3.80±0.10	4.80±0.10	6.30±0.10	8.40±0.20	10.70±0.20	12.60±0.20	14.70±0.30
E	8.15±0.20	10.40±0.20	12.65±0.25	17.30±0.30	21.60±0.50	25.50±0.50	29.60±0.60
F	3.60±0.10	3.25±0.10	4.10±0.10	5.50±0.10	6.30±0.10	8.50±0.10	10.60±0.10
G	5.80min	6.00min	8.80min	9.50min	10.90min	12.90min	17.00min
H	9.00±0.20	9.10±0.20	10.30±0.30	14.30±0.30	16.20±0.30	21.60±0.30	27.00±0.30
Cl(mm ⁻¹)	1.60	0.94	0.78	0.60	0.46	0.39	0.35
Le (mm)	23.3	23.2	29.2	38.4	44.6	56.6	70
Ae (mm ²)	13.8	24.8	37	63	96.6	146	198
Ve (mm ³)	322	574	1090	2440	4310	8340	13900
G(g)	3.8	3.3	4.9	12	22	45	67
PC40	0.19	0.34	0.65	1.46	2.59	5.00	8.34
PC44	0.18	0.32	0.60	1.34	2.37	4.59	7.65
PC95	0.18	0.32	0.60	1.34	2.37	4.59	7.65
AL	PC40	1300	2240	2800	3700	4800	5700
	PC44	1400	2340	2900	3800	5000	5900
	PC95	1750	2979	3590	4667	6100	7200

PC40、PC44:100KHz, 200mT, 100°C
 PC95 :100KHz, 200mT, 80°C
 1) :100KHz, 100mT, 100°C
 2) :25KHz, 200mT, 100°C

1KH, 0.25V, 25°C
 ±25%