


ET FT CORES

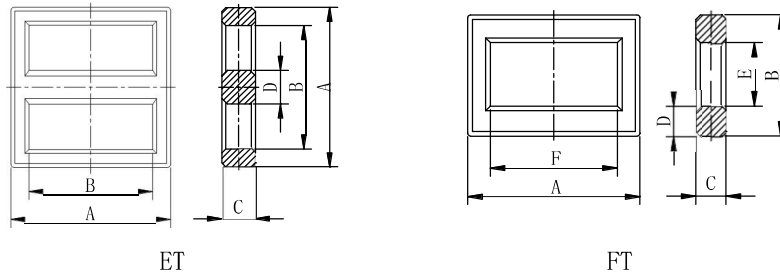

Part#	ET20	ET24	ET28	ET35	FT17.5	FT20	FT21	FT40
	ET	ET	ET	ET	FT	FT	FT	FT
(mm)	A	20.10±0.50	24.20±0.50	28.50±0.50	35.30±0.60	17.50±0.40	20.60±0.40	21.50±0.40
	B	15.70min	19.00min	22.20min	26.80min	15.00±0.30	14.10±0.30	14.90±0.30
	C	4.40±0.20	4.00±0.20	5.00±0.30	7.50±0.30	3.70±0.25	4.60±0.25	4.60±0.25
	D	4.00±0.20	4.00±0.20	5.00±0.30	7.50±0.30	4.20±0.20	4.20±0.20	4.20±0.20
	E(min)	-	-	-	-	6.60±0.20	7.35min	7.60min
	F	-	-	-	-	11.50±0.30	15.70min	19.500min
	C1($\mu\text{r m}^{-1}$)	2.95	3.4	2.7	1.46	3.31	4.49	4.19
	Le (mm)	51.5	60.3	70	85.2	43	53.2	56.1
	Ae (n m^2)	17.4	17.5	27	58.3	13	11.8	13.4
	Ve (mm^3)	870	1050	1890	4960	568	629	752
	G(g)	4.4	5.5	9.6	25.8	3.3	3.8	4.0
AL	R5K	2200	1900	2400	4500	1750	1500	1550
	R7K	3300	2600	3400	6400	2400	2100	2150
	R10K	4400	3600	4800	8500	3300	2800	2850
	R12K	5200	4400	5600	10800	3500	3600	3700

PC40、PC44: 100KHz, 200mT, 100°C
 PC95 : 100KHz, 200mT, 80°C
 1) : 100KHz, 100mT, 100°C
 2) : 25KHz, 200mT, 100°C

1KH, 0.25V, 25°C
 ±25%